

MICRODYN RO

Highest Rejection, Low Energy Brackish Water RO Elements

The MICRODYN RO series of low energy RO membranes is ideal for water purification applications where high rejection combined with reduced energy consumption is required. These elements feature our high rejection, low energy membrane for upgrading an RO system and operate at low pressure conditions. MICRODYN RO elements are available in standard 4" and 8" spiral-wound designs to meet all of your new equipment and direct replacement needs. NSF certification is available upon request for all brackish water MICRODYN RO elements.


MEMBRANE CHARACTERISTICS

Membrane Chemistry	Thin-Film Composite Polyamide
Stabilized Salt Rejection (%)	99.65
Minimum Salt Rejection (%)	99.40

ELEMENT SPECIFICATIONS

Model	4040-XRLE	8040-XRLE-400	8040-XRLE-400/34	8040-XRLE-440
Permeate Flow - m³/day (GPD)^a	7.2 (1,900)	35.9 (9,500)	35.9 (9,500)	39.7 (10,500)
Membrane Area - m² (ft²)^b	7.9 (85)	37.2 (400)	37.2 (400)	40.9 (440)

PHYSICAL DIMENSIONS

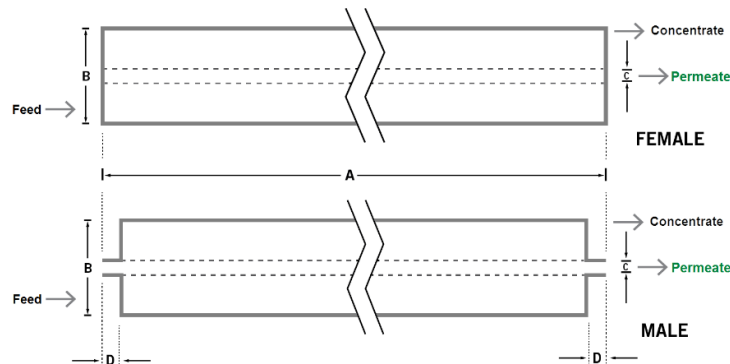

Model	4040-XRLE	8040-XRLE-400	8040-XRLE-400/34	8040-XRLE-440
Dim. A - mm (inches)	1,016 (40.0)	1,016 (40.0)	1,016 (40.0)	1,016 (40.0)
Dim. B - mm (inches)	99 (3.9)	201 (7.9)	201 (7.9)	201 (7.9)
Dim. C - mm (inches)^c	19.1 (0.75)	28.6 (1.125)	28.6 (1.125)	28.6 (1.125)
Permeate Tube^d	Male	Female	Female	Female
Outerwrap Type	Tape	Fiberglass	Fiberglass	Fiberglass
Element Weight - kg (lb)^e	4 (9)	16 (36)	16 (36)	17 (37)

a Test conditions: 1,500 ppm NaCl, 10.3 bar (150 psi), 25°C (77°F), 15% recovery, pH 8.0, 30 minutes operation. Flow rates will be no more than 15% below the values shown. Product specifications may change without notice as design revisions occur.

b All models on this sheet have diamond shaped feed spacers.

c Diameters for Dimension "C" are as follows. For Female elements, "C" is the Inner Diameter. For Male elements, "C" is the Outer Diameter.

d Male elements have a protruding permeate tube, indicated as "D" in the diagram. Dimension "D" is 1.05 in (26.7 mm).

e Shipping weight is dependent on packaging material and quantity shipped.

OPERATING PARAMETERS

Maximum Operating Pressure	Tape Outerwrap Models: 21 bar (300 psi) Fiberglass Outerwrap Models: 41 bar (600 psi)
Maximum Operating Temperature	45°C (113°F)
Cleaning pH Range¹	1.0 – 12.0
Chlorine Tolerance²	< 0.1 ppm
Maximum Pressure Drop	1 bar (15 psi) per element; 4 bar (60 psi) per housing
Maximum SDI₁₅	5.0
Maximum Turbidity	1 NTU

¹ Refer to temperature and pH limits in Membrane Cleaning Guide - Water Application Elements (TSG-C-001).

² Pretreatment is recommended for the removal of free chlorine and other oxidizing agents to prevent damage to membranes. Oxidizing agents, such as free chlorine, in contact with polyamide membranes may result in shortened operating life or membrane failure. Such oxidation damage is excluded from warranty. Refer to Membrane Operating Guide - Recommendations for Water Purification (TSG-O-012).

IMPORTANT INFORMATION

Start-up: MANN+HUMMEL Water & Fluid Solutions recommends flushing elements for 30 minutes at low pressure and discarding permeate during the flush prior to operation. For a more detailed start-up procedure, please see Element Start-Up Guide – System Start-Up (TSG-O-005).

Cleaning: MICRODYN RO membrane elements must be cleaned periodically to ensure proper operation and to prevent membrane damage. Please see Membrane Cleaning Guide – Water Application Elements (TSG-C-001).

Storage: MICRODYN RO membrane elements must be stored appropriately to ensure proper operation and to prevent membrane damage. Please see Element Storage Guides (TSG-O-009 & TSG-O-010).

CUSTOMIZABLE SPECIALTY ELEMENTS

MANN+HUMMEL Water & Fluid Solutions offers a full range of membranes and element designs for challenging water and process applications. Technologies include low-fouling RO, submerged UF, continuous high temperature, ultra-high pressure, unique sanitary designs and more. Contact us to customize a product that satisfies your specific requirements.

Contact

Europe

Germany: +49 611 962 6001
Italy: +39 0721 1796201
info@microdyn-nadir.com

Americas

USA: +1 805 964 8003
sales.mnus@microdyn-nadir.com

Asia

Singapore: +65 6457 7533
China: +86 10 8413 9860
waterchina@mann-hummel.com